


# Product Installation Instructions

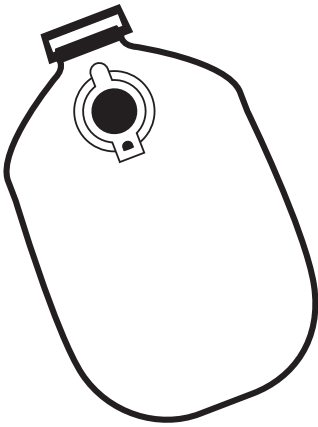

## Flush Saver

### To complete installation you will need:

- A parent/guardian
- Flush Saver (located in your kit)

### Instructions

1. Open the cap on the Flush Saver and fill it to the fill line with water.
2. Snap the cap closed on the Flush Saver.
3. Ask a parent/guardian to carefully take off the toilet tank lid.
4. Carefully place the Flush Saver in the tank and hang it on the side of the tank.
5. Ask a parent/guardian to carefully replace the toilet tank lid back onto the top of the tank.